



# INSTRUCTIONS

-J00120

REV. 5-17-99

Kit Numbers 44100-95 and 44101-95

## FRONT FLOATING BRAKE DISC KIT

### General

This kit is designed to fit all late 1984 through 1999 models, and 2000 FXSTS, and FLSTS models.

Kit contents:	QTY	DESCRIPTION
	1	Brake disc, floating, front
	5	Screw, pan head

### CAUTION

This brake disc must be used **ONLY** with brake pad kit Part No. 44063-83C. If those brake pads are not used, the disc will be damaged and its useful life shortened.

Brake pad kit 44063-83C is original equipment on 1992 and later models. 1991 and earlier models must use 44063-83C brake pads. These pads are identified by the number 56 stamped into the outside brake pad backing surface, opposite the friction material.

Qty	Description	Part Number
1	Brake pad kit, front	44063-83C

### NOTE

Kit No.'s 44144-95, 44145-95, and 44159-95 (see below) are **NOT** required on 1995 and later models.

### CAUTION

These kits are complete and must be installed **AS A KIT**. **DO NOT** use old mounting bracket or pins because this may cause noise and damage to brake system components.

The following kit is required to install floating brake disc on **LEFT** front side for all 1984-1994 models, except FXSTS:

Qty	Description	Part Number
1	Front floating brake disc kit, left	44144-95

The following kit is required to install floating brake disc on **RIGHT** front side for all 1984-1994 models equipped with dual discs:

Qty	Description	Part Number
1	Front floating brake disc kit, right	44145-95

The following kit is required to install floating brake disc on 1988-1994 FXSTS models and models equipped with Springer front end kits:

Qty	Description	Part Number
1	Front floating brake disc kit, Springer	44159-95

### Installation

1. See the appropriate Service Manual for all removal, assembly and disassembly procedures.

### NOTE

A Service Manual for your vehicle is available from your Harley-Davidson dealer.

### NOTE

The floating disc screw holes are countersunk to accept the retaining screw heads. Be sure you install the screws properly.

2. Assemble brake disc, caliper and pads as described in appropriate Service Manual.
3. See Service Parts Illustration. Install new pan head screws. Tighten screws to torque values given in Service Manual.

### CAUTION

If possible, avoid hard stops for 300 miles. Hard stops during the wear-in period will gall discs.




## Service Parts

Part No. 44100-95, 44101-95 | Date 5/99

Front Floating Brake Disc Kit

sp44100

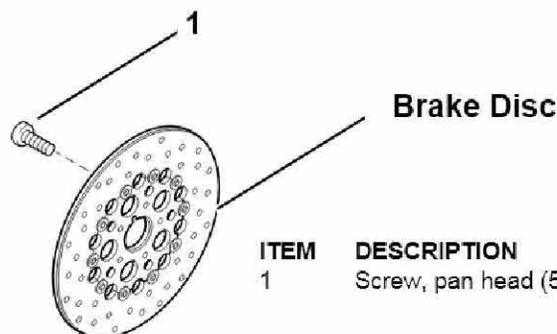

ITEM	DESCRIPTION	PART NO.
1	Screw, pan head (5)	3655